




Malleable

Images

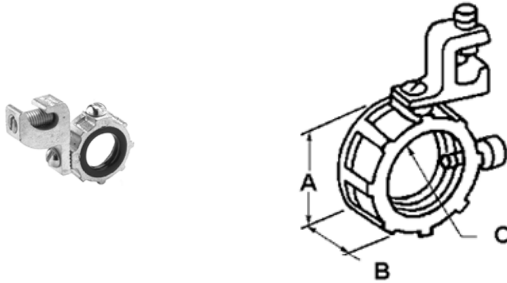

Application

Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug: aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. 1/2" thru 4" rated 150 degree C, 5" and 6" rated 105 degree C.

Product Information

[Download Photo Image](#) [Download Dimensional Image](#)

Dimensional Data

Catalog Number	Dimension A	Dimension B	Dimension C
381	1-1/16	3/8	5/8
382	1-1/4	7/16	13/16
383	1-1/2	9/16	1
384	1-7/8	3/4	1-15/16
384-14	1-7/8	3/4	1-15/16
385	2-3/16	11/16	1-9/16
385-14	2-3/16	11/16	1-9/16
386	2-5/8	13/16	2
386-14	2-5/8	13/16	2
387	3-1/8	13/16	2-5/16
387-40	3-1/8	1	2-5/16
388	3-3/4	1	2-7/8
388-40	3-3/4	1	2-7/8
389	4-5/16	1	3-3/8
389-40	4-5/16	1	3-3/8
390	4-7/8	1	3-7/8
390-40	4-7/8	1	3-7/8
391	6-1/8	1-1/8	4-13/16
392	7-3/16	1-1/8	5-13/16

Catalog Number	Trade Size	UPC Item Number
381	1/2"	00381
382	3/4"	00382
383	1"	00383
384	1 1/4"	00384
384-14	1 1/4"	03841
385	1 1/2"	00385
385-14	1 1/2"	03851
386	2"	00386
386-14	2"	03861
387	2 1/2"	00387
387-40	3 1/2"	03874
388	3"	00388
388-40	3"	03884
389	3 1/2"	00389
389-40	3-1/2"	03894
390	4"	00390
390-40	4"	03904
391	5"	00391
392	6"	00392

Material: Malleable Iron
Zinc electro-plate.
Finish: Grounding lug: Tin electro-plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL-514B
UNSPSC: 39121312

Catalog ID: 381

UPC Number: 781747003812

Description: Bushing, Insulated, Grounding, Malleable Iron, Size 1/2 Inch

Application: Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug: aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. 1/2" thru 4" rated 150 degree C, 5" and 6" rated 105 degree C.

Trade Size: 1/2"