



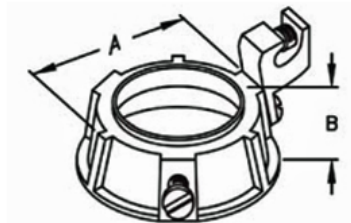

Malleable - Threadless

Images



Application

For use on threadless rigid and IMC conduit where an insulated grounding bushing is required. Rated 150 Degree C. cULus listed. Patented

Product Information

Catalog Number	Trade Size	UPC Item Number
TL-381	1/2"	01381
TL-382	3/4"	01382
TL-383	1"	01383
TL-384	1-1/4"	01384
TL-38414	1-1/4"	13841
TL-385	1-1/2"	01385
TL-38514	1-1/2"	13851
TL-386	2"	01386
TL-38614	2"	13861
TL-387	2-1/2"	01387
TL-38740	2-1/2"	13874
TL-388	3"	01388
TL-38840	3"	13884
TL-389	3-1/2"	01389
TL-38940	3-1/2"	13894
TL-390	4"	01390
TL-39040	4"	13904

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimensional Data

Catalog Number	Dimension A	Dimension B	Dimension C
TL-381	1.0625	.6875	
TL-382	1.25	.6875	
TL-383	1.625	.75	
TL-384	2	.8125	
TL-38414	2	.8125	
TL-385	2-3125	.8125	
TL-38514	2.3125	.8125	
TL-386	2.75	.875	
TL-38614	2.75	.875	
TL-387	3.3125	1	
TL-38740	3.3125	1	
TL-388	4	1	
TL-38840	4	1	
TL-389	4.375	1.0625	
TL-38940	4.375	1.0625	
TL-390	5.0625	1.125	
TL-39040	5.0625	1.125	

Material: Malleable Iron
Zinc Plated
Finish: Grounding lug: Tin
Electro-plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL-514B
UNSPSC: 39121312

Catalog ID: TL-381

UPC Number: 78174701381

Description: Threadless Bushing, Insulated, Grounding, Malleable Iron, Size 1/2 Inch

Application: For use on threadless rigid and IMC conduit where an insulated grounding bushing is required. Rated 150 Degree C. cULus listed. Patented

Trade Size: 1/2"