




Grounding - Steel

Images

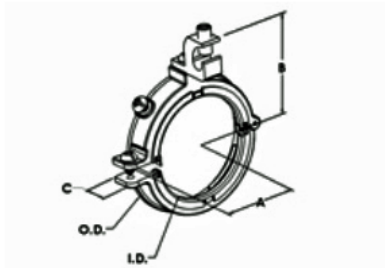

Application

Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated Grounding bushing is required. Grounding lug, aluminum alloy 6061-T6. Rated 150 Degree C. cULus listed. Patented

Product Information

Catalog Number	Trade Size	UPC Item Number
SGBS-382CL	3/4"	23820
SGBS-383CL	1"	23830
SGBS-38414	1-1/4"	23842
SGBS-384CL	1-1/4"	23840
SGBS-38514	1-1/2"	23852
SGBS-385CL	1-1/2"	23850
SGBS-38614	2"	23862
SGBS-386CL	2"	23860
SGBS-38740	2-1/2"	23875
SGBS-387CL	2-1/2"	23870
SGBS-38840	3"	23885
SGBS-388CL	3"	23880
SGBS-38940	3-1/2"	23895
SGBS-389CL	3-1/2"	23890
SGBS-39040	4"	23905
SGBS-390CL	4"	23900

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimensional Data

Catalog Number	Dimension A	Dimension B	Dimension C
SGBS-382CL	1.25	1.80	0.73
SGBS-383CL	1.37	1.90	0.73
SGBS-38414	1.54	1.97	0.73
SGBS-384CL	1.54	2.47	0.73
SGBS-38514	1.67	2.08	0.73
SGBS-385CL	1.67	2.57	0.73
SGBS-38614	1.90	2.29	0.73
SGBS-386CL	1.90	2.68	0.73
SGBS-38740	2.18	3.65	0.73
SGBS-387CL	2.18	3.03	0.73
SGBS-38840	2.49	4.08	0.73
SGBS-388CL	2.49	3.46	0.73
SGBS-38940	2.74	4.22	0.73
SGBS-389CL	2.74	4.00	0.73
SGBS-39040	2.99	4.47	0.73
SGBS-390CL	2.99	4.25	0.73

Material: Steel
Zinc Plated,
Finish: Grounding Lug,
Tin Electro-Plate

Certifications & Codes:

Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E20412
UL Standard:	UL-514B
UNSPSC:	39121312

Catalog ID: SGBS-382CL

UPC Number: 78174723820

Description: Split Bushing, Insulated, Grounding, Zinc Plated Steel, Size 3/4 Inch

Application: Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated Grounding bushing is required. Grounding lug, aluminum alloy 6061-T6. Rated 150 Degree C. cULus listed. Patented

Trade Size: 3/4"